

**THIS PAGE IS INSERTED BY OIPE SCANNING
AND IS NOT PART OF THE OFFICIAL RECORD**

Best Available Images

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

BLACK BORDERS

TEXT CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT

BLURRY OR ILLEGIBLE TEXT


SKEWED/SLANTED IMAGES

COLORED PHOTOS HAVE BEEN RENDERED INTO BLACK AND WHITE

VERY DARK BLACK AND WHITE PHOTOS

UNDECIPHERABLE GRAY SCALE DOCUMENTS

**IMAGES ARE THE BEST AVAILABLE
COPY. AS RESCANNING *WILL NOT*
CORRECT IMAGES, PLEASE DO NOT
REPORT THE IMAGES TO THE
PROBLEM IMAGE BOX.**



In re Application of:
Simpson, et al.

Serial No.: 10/614,427

Filed: July 7, 2003

Confirmation No.: Unknown

For: Formed Tubulars

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

~~~~~

Group Art Unit: Unknown

Examiner: Unknown

CERTIFICATE OF MAILING  
37 CFR 1.8

I hereby certify that this correspondence is being deposited on  
30 Sept, 2003 with the United States Postal Service  
as First Class Mail in an envelope addressed to  
Commissioner for Patents, P.O. Box 1450 Alexandria, VA  
22313-1450.

30 Sept 03                      William R. Pitter  
Date                                      Signature


## CLAIM TO PRIORITY

Applicant(s) reaffirm the claim for the benefit of filing date of the following foreign patent application referred to in Applicant's Declaration:

Great Britain Application Serial Number 0215659.4 filed July 6, 2002.

A copy of the application certified by the British Patent Office is enclosed.

Respectfully submitted,

  
William B. Patterson  
Registration No. 34,102  
MOSER, PATTERSON & SHERIDAN, L.L.P.  
3040 Post Oak Blvd. Suite 1500  
Houston, TX 77056  
Telephone: (713) 623-4844  
Facsimile: (713) 623-4846  
Agent for Applicant(s)





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed 

Dated 9 December 2002






1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

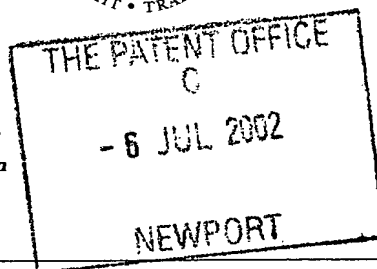

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

AS\AM\P12050GB

2. Patent application number

(The Patent Office will fill in this part)

0215659.4

06JUL02 E731436-1 D00239  
01/7700 0.00-0215659.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

WEATHERFORD/LAMB, INC.  
515 POST OAK BOULEVARD  
SUITE 600  
HOUSTON  
TX 77027  
UNITED STATES OF AMERICA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8028714001  
DELAWARE CORPORATION

4. Title of the invention

FORMED TUBULARS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

CRUIKSHANK & FAIRWEATHER  
19 ROYAL EXCHANGE SQUARE  
GLASGOW  
G1 3AE  
SCOTLAND  
UNITED KINGDOM

Patents ADP number (if you know it)

547002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 22

Claim(s) 12

Abstract 1

Drawing(s) 5 15 PM

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)


Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

CRUIKSHANK & FAIRWEATHER

12. Name and daytime telephone number of person to contact in the United Kingdom ANDREW SHANKS 0141 221 5767

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



## FORMED TUBULARS

## FIELD OF THE INVENTION

This invention relates to tubulars, and in particular to downhole tubulars, which may take the form of bore-lining casing or liner, production tubing, work strings or the like. In particular, the present invention relates to  
5 formed tubulars which have a corrugated wall over at least a portion of their length, and also to methods of forming corrugations in tubulars, methods of utilising such tubulars, and tools and devices adapted for use in conjunction with such tubulars.

## 10 BACKGROUND OF THE INVENTION

Where deep bores are drilled to gain access to subsurface formations, for example as in the oil and gas exploration and production industry, it is conventional to line the drilled bores with metallic tubulars. Typically,  
15 the tubulars take the form of thick-walled cylindrical tubulars sections which are coupled together and run into the drilled holes as strings. Methods of producing, handling and running in of such tubulars are well established, however problems remain, particularly in  
20 running tubulars strings into bores, and these problems

become more acute as attempts are made to access hydrocarbon deposits in more challenging locations, and the drilled bores become longer and more highly deviated.

It is among the objectives of at least one embodiment of an aspect of the present invention to provide downhole tubulars which obviate or mitigate some of the problems of existing tubular forms.

#### SUMMARY OF THE INVENTION

According to the present invention there is provided a method of lining a drilled bore, the method comprising:  
running a tubular into a drilled bore; and  
corrugating the tubular in the bore, to increase the collapse resistance of the tubular.

Testing has shown that corrugating a conventional cylindrical-walled tubular tends to increase the collapse resistance of the tubular, typically by a factor of two. Thus, the present invention allows an operator to line a bore with tubulars which, before corrugation, have perhaps only half of the collapse resistance of conventional tubulars which would otherwise be utilised. This allows use of lighter tubulars, with corresponding savings in material and transport costs, and facilitates handling of the tubulars. In addition, or alternatively, the operator may choose to use lighter tubulars of higher quality material, for example with a higher chromium content.

The invention may also be usefully employed when, for example, a drilling operation encounters a formation such as clay, shale or salt which has a tendency to swell or flow causing the bore to close in prematurely, or even to crush casing which may already have been set across the section. Where surveys have identified that such formations are likely to be encountered, heavy wall casing capable of withstanding the collapse pressures will be on hand and available to run across the problem area. However, in many cases these problem formations are not anticipated beforehand and when encountered an intermediate casing has to be run into the bore and which casing must then be subsequently reinforced by a further casing, reducing the available bore diameter of the well. However, by virtue of the present invention, if a problem formation is encountered, a standard casing may be run across the problem area and then corrugated, the corrugated casing possessing the collapse resistance necessary to prevent the bore from closing. Furthermore, as will be described below, the casing may also be diametrically expanded, such that the intermediate casing will not restrict the bore diameter.

Preferably, the tubular is a thin-walled tubular. In the context of bore-lining tubulars, conventional tubulars typically have a wall thickness in excess of 6 mm, however, as noted above, the present invention facilitates use of

thinner walled tubulars, without loss of collapse resistance. Most preferably, the tubular has a wall thickness of less than 6 mm, and typically around 3 to 4 mm. Alternatively, the tubular may be a conventional tubular, having a wall thickness in excess of 6 mm.

Preferably, the corrugation of the tubular also diametrically expands the tubular. Depending on the degree of expansion, this may permit the tubular to be run in through existing bore-lining tubing having an internal first diameter and the tubular then expanded to an internal diameter at least as large as the first diameter. Alternatively, the tubular may be diametrically expanded in a separate step from the corrugation step, either before or after corrugation. The diametric expansion following corrugation may create a cylindrical wall form. In one embodiment of the invention, a thin wall tubular having an external diameter of 7 5/8" is run in through existing 9 5/8" casing (having an internal diameter of 8 1/2"). The tubular is then corrugated and expanded, such that the minimum internal diameter, at the peaks of the corrugations, is 8 1/2". The corrugated tubular may thus serve to support the bore wall, but allows the subsequent 7 5/8" casing to be run in and cemented below the 9 5/8" casing.

The tubular may be corrugated from the top down, or from the bottom up. The tubular may be expanded from the

top down, or from the bottom up.

The method may comprise the further step of cementing the tubular in the bore, to seal and secure the tubular relative to the bore wall. In other embodiments, the tubular may carry a deformable material on an external surface of the tubular, or may be provided in combination with a sleeve of deformable material.

Some or all of the tubular may be corrugated; it may be desired to retain a section of cylindrical-walled tubular, for coupling to or for receiving conventional connectors, tools or devices.

The corrugations may extend solely circumferentially, but are preferably helical.

At least one further tubular may be located internally of the corrugated tubular, which further tubular may have a cylindrical wall, and which tubular may subsequently be diametrically expanded.

Tools or devices may be located within the corrugated tubular, and other aspects of the invention relate to tools and devices adapted to engage the corrugated tubular. For example, rather than providing conventional slips or a portion adapted to engage a particular nipple profile, a device may include radially extendable portions profiled to correspond to the corrugated wall. Thus, a device may be securely located at any desired location within a tubular. In a similar fashion, a packer may be provided with packer

elements shaped to engage and conform to the corrugated tubular wall form. These packer elements will not form notches in the casing wall, as occurs with slips, and which notches act as a starting point for corrosion. The tool  
5 may take the form of a well control dart, which is dropped into the bore and travels down through the bore until flow of fluid up through the bore reaches a level where the dart is moved upwardly. When this occurs, the dart is arranged to engage the surrounding wall of the corrugated tubular,  
10 and close the bore. Such tools and devices are of course less likely to be displaced by axial forces, and corrugated or wave-form sealing members are less likely to be extruded out than conventional elastomer sleeves or seals. Other aspects of the invention relate to tractors and the like  
15 which are adapted to utilise the corrugations to facilitate travel through the tubular.

Preferably, the corrugations are formed by a rotary expander, that is an expander featuring at least one bearing member which applies a radial force to an inner  
20 wall of the tubular and which is rotated within the tubular, typically while being advanced axially through the tubular. The axially advancement may be achieved by any appropriate means, such as application of an external force achieved by, for example, application of weight from  
25 surface or use of a tractor. Alternatively, the rotary expander may feature skewed rollers, such that rotation of

the expander in the tubular creates an axial force on the expander. Preferably, the expander features a plurality of bearing members, typically three, and most preferably the bearing members include rolling elements, which may be in the form of balls or rollers, to provide a rolling contact with the tubular wall. The rotary expander may describe a single, fixed diameter, but is preferably configurable in a smaller diameter configuration and a larger diameter expansion configuration. The bearing member may be movable between the configurations by any appropriate means, for example by application of mechanical force and co-operation of cam faces, but is most preferably fluid actuated. The expander may take the form of one of the expanders described in applicant's WO 00/37766. The rotary expander may be configured to create a single circumferential or helical corrugation, or may be configured to create a plurality of corrugations, for example a triple helical corrugation.

Other aspects of the invention relate to corrugated tubulars which are run into a bore in the corrugated form. The tubulars may be corrugated on surface utilising a rotary expansion tool as described above, which tool may be rotated relative to a cylindrical tubular to achieve the desired degree of corrugation. Alternatively, a tool may be provided for engaging the outer wall of a cylindrical tubular, to achieve the desired degree of corrugation. For

heavier tubing, or to obtain tighter corrugations, it may be preferable or necessary to provide a tool which engages both the inner and outer walls of the tubular. In other embodiments of the invention the corrugations may be provided by other methods. As noted above, the presence of corrugations tends to provide a collapse resistance which is high relative to the tubular wall thickness. Thus, the invention has particular application to thin-walled tubulars, which are relatively easily corrugated, and once corrugated provide a level of collapse resistance corresponding to significantly thicker parallel-walled tubulars.

The tubulars may be annealed or otherwise treated following corrugation, to reduce or minimise any work-hardening effects and to reduce internal stresses which might lead to an increased susceptibility to corrosion. Such tubulars may also be subsequently expanded or otherwise deformed more readily.

Aspects of the invention relate to particular uses and applications of such tubulars, some of which are described below.

The presence of a preferably helical corrugation in the tubular outer wall provides a protective recess in which elongate members or elements such as conduits, signal carriers, power carriers, heating elements and the like may be located, and aspects of the invention relates to



corrugated tubulars provided in combination with such members and elements.

Alternatively, or in addition, the presence of corrugations provides protective recesses in which to  
5 locate a sealing or filling material, or which may be utilised to carry a material into a bore. For example, external corrugations may be at least partially filled with a flowable or settable material, the peaks of the corrugations protecting the material as the tubular is run  
10 into the bore. Once in the bore, the corrugated tubular may be diametrically expanded, such that at least some of the material is pushed out of the troughs of the corrugations to fill and seal the annulus between the tubular and the bore wall. A degree of corrugation may be  
15 retained, or the expansion may be such that the expanded tubing is parallel-walled. This obviates the requirement to cement the tubular in the bore, and it is not necessary to size the bore (or reduce the tubular diameter) to provide an annulus which is sufficiently large to  
20 accommodate cement circulation.

The different aspects of the invention also have utility in subsea or surface applications, for example as risers or forming parts of risers, flowlines or pipelines. The corrugations provide flexibility which is useful when  
25 the tubular is likely to experience movement, bending or axial extension or contraction. In such embodiments, a

corrugated metallic tubular may be embedded within a flexible polymeric or elastomeric material, or may have an internal or external coating.

Aspects of the invention relate to running corrugated tubulars into a bore, which provides numerous advantages, as described below.

The corrugated tubulars will be less prone to differential sticking than conventional cylindrical-walled tubulars, and accordingly may be selected for bores where it is anticipated that differential sticking may be a problem. Differential sticking may occur where a bore intersects a relatively low pressure formation, such that a tubular in contact with the bore wall may be pushed into contact with the wall by the pressure of the fluid in the bore. With the corrugated tubulars, only the peaks of the corrugations will contact the wall, such that potential for differential sticking is significantly reduced. The presence of the corrugations may also assist when the tubular is cemented in the bore. These advantages may be achieved using helical corrugations having a relatively large pitch, for example 4 to 10 feet.

The applicant has also recognised that many of the advantages gained by use of corrugated tubulars will be available from running conventional parallel walled tubulars in corrugated bores, and other aspects of the invention relate to the provision of such corrugated bores.

The corrugated tubular has greater flexibility than a conventional cylindrical-walled tubular providing corresponding collapse resistance. Furthermore, the corrugated tubular will be significantly lighter. Thus, handling of the tubular is facilitated, as is the ability of the tubular to accommodate bends, dog legs or steps in the bore, which may occur during drilling of the bore or following drilling of the bore; corrugated tubulars may be selected for use in bores where such conditions are likely to be encountered. Embodiments of the invention therefore include corrugated casing and liner. Helical corrugations may also be used to advantage when running corrugated tubulars: if a difficulty is encountered on running a tubular into a bore, if the tubular is rotated the corrugations in contact with the bore wall will act in a similar manner to a screw-thread, and will tend to create an axial force between the tubular and the bore wall, which may serve to advance or retract the tubular, and may facilitate overcoming a restriction or tight spot in the bore. Furthermore, the corrugations may be employed in a similar fashion to dislodge or disturb drill cuttings and the like which have gathered on the low side of an inclined bore, and which may create difficulties when attempting to run a tubular into a bore. The presence of corrugations in large diameter tubular strings which are rotated on a bore also reduces the likelihood of connector failure as the

additional flexibility provided by the corrugations serves to reduce the cyclic bending loads experienced by the relatively stiff connectors between the individual tubulars.

5           Aspects of the invention also relate to drilling using corrugated tubulars as a drill bit support, and in particular drilling with corrugated casing. As identified above, such casing will be less likely to experience differential sticking. The casing may subsequently be  
10           diametrically expanded, either retaining a degree of corrugation or being expanded to a parallel-walled form.

          Rotation of a corrugated tubular is also useful during a cementing or bore-cleaning operation, as the corrugations will tend to disturb any drill cuttings lying in the bore,  
15           and will enhance even cement distribution around a tubular. Some of these effects will of course also be available from solely axial movement of the tubular in the bore.

          The enhanced flexibility provided by the corrugated wall may also be utilised to advantage in providing  
20           tubulars for passing through lateral junctions into lateral wells. Due to the enhanced flexibility of the corrugated tubing, it is possible to pass relatively large diameter tubulars through the junctions, which may involve deviations of the order of 20 to 40 degrees per 100 feet.

25           The flexibility of the corrugated tubing may also be utilised to advantage to allow provision of reelable

tubing, which may be of relatively large diameter, and which may provide relatively high levels of collapse resistance for a given wall thickness.

The presence of corrugations may also be utilised for coupling adjacent corrugated tubular sections. By providing corresponding helical corrugations it is possible to thread adjacent tubular sections together by relative rotation, or it may simply be enough to push the sections together, or to corrugate an inner tubular in a corresponding manner to a surrounding outer tubular. The thread provided by the corrugations may be parallel or tapered, and in other embodiments the corrugations may be circumferential. To facilitate provision of a seal at such a coupling, deformable material may be provided on one or both of the tubular sections. This aspect of the invention may be utilised in a wide variety of applications, but is particularly useful in achieving a coupling at a lateral junction, where difficulties are often experienced when using conventional coupling-forming methods. For use in coupling sections of casing and liner, this feature obviates the need to provide separate connectors, and thus also avoids the upsets that are created by such connectors. The couplings formed will also be better able to withstand torques applied to the tubulars.

If desired, only a portion of a tubular may be corrugated. The corrugated portion may be provided, as

mentioned above, to facilitate coupling. For example, an upper portion of a liner may be corrugated to facilitate coupling with a liner hanger, or to engage a corrugated lower portion of existing casing, thus obviating the requirement to provide a separate liner hanger. Alternatively, a selected portion of the tubular may be corrugated, such that the tubular will preferentially flex at the corrugated location, or if it is desired that a portion of the tubular have greater flexibility. This may be useful when the tubular is utilised in, for example, an earthquake zone, and earth movements are likely, or if it is desired to provide a tubular with a relatively flexible end portion to facilitate entry to a lateral bore.

The corrugated tubing of embodiments of the invention may also be usefully employed in the creation of liner hangers and the like where it is desired to provide hanging support for a tubular while providing a fluid flow path to allow displacement of fluid from an annulus to facilitate cementing of the tubular. The flow path may subsequently be closed by energising or activating seals above or below the corrugated portion, by subsequently expanding and flattening the corrugated portion, or simply by passing cement slurry into the corrugations, which cement then sets or cures within the corrugations.

A temporary or permanent liner hanger may also be created by forcing a corrugated section of tubular into a

bore section having an internal diameter less than the diameter described by the peaks of the tubular, such that the corrugated section experiences a degree of elastic deformation, and the resulting restoring force produced by the deformation provides for sufficient frictional contact between the tubular and the bore wall to retain the tubular in the bore. Alternatively, or in addition, a corrugated section of tubular may be placed in tension, such that the diameter described by the tubular decreases. The tubular is then located in a bore section, and the tension then reduced, such that the tubular experiences an increase in diameter and engages the wall of the bore section.

The provision of circumferential or helical corrugations will tend to decrease the axial stiffness of a tubular and thus enhances the ability of the tubular to accommodate axial compression or expansion. Thus, completion tubing featuring a corrugated section may accommodate the axial forces that result from the temperature variations experienced by the tubing, for example between the tubing being run into the bore and sealed and located in the bore, and the tubing subsequently carrying relatively high temperature production fluid. Such temperature variations, and the resulting length changes in the tubing, are conventionally accommodated by means of seal bands engaging a polished bore receptacle (PBR), which permits a degree of movement of the lower end

of the tubing, without loss of seal integrity. However, the seals and the PBR are vulnerable to damage. Embodiments of the present invention allow completion or production tubing to be locked into a seal. Corrugated tubing sections may be provided at any appropriate location in the tubing, and indeed a similar advantage may be achieved by providing a bore-mounted seal which incorporates a corrugated bellows section between the seal and the mounting to the bore wall.

As noted above, corrugated tubulars in accordance with aspects of the invention may be subject to diametric expansion. On experiencing such expansion, corrugated tubulars tend to axially expand. This contrasts with swage expansion of parallel walled cylindrical tubulars, which tends to result in axial contraction of the tubular. This contraction may present significant problems, particularly in bottom-up swage expansion; a string of tubulars may contract by approximately 5%, and if the string is differentially stuck in the bore above the expansion location, the tubing will tend to stretch and the tubulars may part, particularly at weak points such as tubular connections. If desired, these effects may be combined, by providing a corrugated section or section in a tubular to be swage expanded, such that, following expansion, there is no net change in the overall length of the tubular. Furthermore, even if a degree of axial expansion or



contraction is present, the presence of the corrugations will readily accommodate a degree of contraction, and the presence of the corrugations makes the occurrence of differential sticking far less likely. Alternatively, it is possible to select a degree of corrugation that when expanded and flattened neither axially expands nor contracts.

#### BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the present will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 illustrates a tubular being corrugated in accordance with an embodiment of a first aspect of the present invention;

Figures 2 and 3 illustrate steps in the corrugation of a downhole tubular in accordance with an embodiment of another aspect of the present invention.

Figures 4 and 5, and Figures 6 and 7 illustrate steps in the expansion of corrugated tubulars in accordance with embodiments of further aspects of the present invention; and

Figure 8 is a schematic illustration of a lateral junction featuring tubing in accordance with an embodiment of a yet further aspect of the present invention.

## DETAILED DESCRIPTION OF THE DRAWINGS

Reference is first made to Figure 1 of the drawings, which illustrates a tubular 10 being corrugated in accordance with an embodiment of a first aspect of the present invention. Located within the tubular is a corrugation tool 20, mounted on a pipe 21, the tool 20 being of a similar form to the expansion tools as described and illustrated in applicant's WO 00/37766. The tool 20 comprises a hollow body 22 having three radially extending apertures 24 (only two shown) which each accommodate a piston 26, with a roller 28 being mounted on each piston. The rollers 28 are each arranged to rotate around a respective axis which is slightly skewed relative to the tool body axis. Each roller features a raised rib 30, the relative axial locations of the ribs 30 being such that rotation of the fluid-pressure energised tool 20 causes the roller ribs 30 to create a single helical corrugation 32 in the wall of the tubular 10, and also pulls the tool 20 through the tubular 10. Corrugation of the tubular 10 increases the collapse resistance of the tubular 10.

Reference is now made to Figures 2 and 3 of the drawings, which illustrates a downhole tubular 40 being corrugated and expanded in accordance with an embodiment of another aspect of the present invention. As illustrated in Figure 2, the tubular 40 is first run into the lower open section of a drilled bore 42, through existing casing 44.

An appropriate corrugation tool, such as illustrated in Figure 1, is then run into the tubular 40, mounted on the lower end of a pipe string 21. The tool 20 is rotated and advanced through the tubular 40 to create a single helical corrugation 52 in the wall of the tubing 40, as shown in Figure 3. Furthermore, the tool 20 diametrically expands the tubular 40 to a minimum internal diameter corresponding to the internal diameter of the casing 44.

The expanded and corrugated tubular 40 may serve as an intermediate casing, allowing further, conventional casing 54 (shown in chain-dotted outline) to be subsequently run in and located in the bore without any additional loss of diameter.

Reference is now made to Figures 4 and 5 of the drawings, which illustrate a corrugated tubular 60 being run into a bore 62 and expanded to a parallel-walled form (Figure 5) within the bore 62.

The tubular 60 may form part of a casing string to be run into and set in the bore 62. The tubular 60 is initially corrugated, and this offers a number of advantages when running in. Only the peaks of the corrugations contact the bore wall, such that differential sticking is unlikely to occur. Furthermore, if the tubular 60 is rotated in the bore 62, the helical corrugations will tend to act in a similar manner to a screw thread, and pull the tubular through the bore; this may be useful in

negotiating tight spots, ledges and the like. In certain situations it may also be advantageous to rotate the tubular 60 in the opposite direction, to allow the tubular to be retracted. The corrugations will also assist in dislodging and agitating cuttings which may have settled on the low side of the bore. The flexibility provided by the corrugations will also facilitate bending of the string, to facilitate negotiation of bends or curves in the bore 62. The presence of the corrugations also reduces the cyclic stresses experienced by the relatively stiff casing connectors if the string is being rotated.

On reaching the desired location, the tubular is diametrically expanded, using a rotary expander as described with reference to Figure 1, which expansion also creates an expanded tubular 60 with substantially parallel walls.

Figures 6 and 7 illustrate a corrugated tubular 64 being run into a bore 66 (Figure 6), which tubular 64 is then expanded to a larger diameter, while retaining a corrugated wall (Figure 7).

Reference is now made to Figure 8 of the drawings, which is a schematic illustration of a lateral junction 70 featuring tubing in accordance with an embodiment of a second aspect of the present invention.

The junction 70 is between a primary bore 72 and a lateral bore 74, and the junction 70 features a pre-

corrugated casing 76, the corrugations facilitating accommodation of the deviation between the bores 72, 74. Furthermore, to place the casing 76 in the bore 74, the casing 76 may have been rotated such that the helical corrugations act as screw threads, to assist in negotiating tight spots in the bores 72, 74, and in particular the window into the lateral bore 74.

Following the casing 76 being secured at the junction 70, and the lateral bore 74 being drilled beyond the bore lined by the casing 76, a parallel-walled liner 78 is run into the bore 74, at least the upper end of the liner 78 overlapping the lower end of the casing 76. At least the overlapping portion of the liner 78 is then expanded (not shown) and corrugated to correspond to the surrounding corrugated casing 76. The liner 78 will thus be locked and sealed relative to the casing 76.

In other embodiments, the liner may have been corrugated on surface, and once in overlapping relationship with the casing the liner may be expanded while retaining the corrugations.

Those of skill in the art will recognise that these embodiments are merely exemplary of the present invention, and that various modifications and improvements may be made thereto, without departing from the scope of the invention. For example, the invention has utility in subsea applications, for example in pipelines, where the

flexibility of the corrugated pipes and the ability to accommodate axial extension and contraction facilitate maintaining pipeline integrity when the pipeline experiences temperature variations or movements in the supporting seabed.

## CLAIMS

1. A method of lining a drilled bore, the method comprising:

running a tubular into a drilled bore; and

5 corrugating the tubular in the bore, to increase the collapse resistance of the tubular.

2. The method of claim 1, wherein the tubular is a thin-walled tubular.

3. The method of claim 2, wherein the tubular has a wall  
10 thickness of less than 6 mm.

4. The method of claim 3, wherein the tubular has a wall thickness of around 3 to 4 mm.

5. The method of claim 1, wherein the tubular has a wall thickness of at least 6 mm.

15 6. The method of any of the preceding claims, wherein the step of corrugating the tubular also diametrically expands the tubular.

7. The method of claim 6, wherein the tubular is run in through existing bore-lining tubing having an internal first diameter and the tubular is then expanded to an internal diameter at least as large as the first diameter.

5 8. The method of any of the preceding claims, wherein the tubular is diametrically expanded in a separate step from the corrugation step.

9. The method of claim 8, wherein the tubular is diametrically expanded before corrugation.

10

10. The method of claim 8, wherein the tubular is diametrically expanded after corrugation.

11. The method of claim 10, wherein the diametric expansion creates a cylindrical wall form.

15

12. The method of any of the preceding claims, wherein the tubular is corrugated from the top down.

13. The method of any of claims 1 to 11, wherein the tubular is corrugated from the bottom up.

20

14. The method of any of the preceding claims, wherein the tubular is expanded from the top down.



15. The method of any of claims 1. to 13, wherein the tubular is expanded from the bottom up.

16. The method of any of the preceding claims, further comprising the step of cementing the tubular in the bore.

5 17. The method of any of the preceding claims, wherein the tubular carries a deformable material on an external surface of the tubular.

10 18. The method of any of the preceding claims, wherein the tubular is provided in combination with a sleeve of deformable material.

19. The method of any of the preceding claims, wherein only a portion of the tubular is corrugated, to retain a section of cylindrical-walled tubular.

15 20. The method of any of claims 1 to 20, wherein all of the tubular is corrugated.

21. The method of any of the preceding claims, wherein the corrugations extend solely circumferentially.

22. The method of any of claims 1 to 20, wherein the corrugations extend helically.

23. The method of any of the preceding claims, further comprising locating at least one further tubular internally of the corrugated tubular.

24. The method of claim 23, wherein the at least one  
5 further tubular has a cylindrical wall.

25. The method of claim 23 or 24, wherein the at least one further tubular is subsequently diametrically expanded.

26. The method of any of the preceding claims, further comprising locating a tool or device within the corrugated  
10 tubular.

27. The method of any of the preceding claims, wherein the corrugations are formed by a rotary expander featuring at least one bearing member which applies a radial force to an inner wall of the tubular and which expander is rotated  
15 within the tubular, and is advanced axially through the tubular.

28. The method of claim 27, wherein the rotary expander is configured to create a single-start helical corrugation.

20 29. The method of claim 27, wherein the rotary expander is configured to create a multiple-start plurality of helical

corrugations.

30. A method of forming a downhole tubular, comprising corrugating a cylindrical tubular by rotating a rotary expansion tool relative to the tubular.

5 31. The method of claim 30, wherein the tool is advanced axially relative to the tubing to create at least one helical corrugation.

32. A thin-walled downhole tubular having a corrugated wall.

10 33. A downhole tubular having a corrugated wall, the tubular having been annealed following corrugation.

34. A downhole tubular having a wall defining helical corrugations and an elongate member or element located in the troughs of the corrugations.

15 35. The tubular of claim 34, wherein a signal carrier is located in the troughs of the corrugations.

36. The tubular of claim 34 or 35, wherein a conduit is located in the troughs of the corrugations.

37. The tubular of claim 34, 35 or 36, wherein a power carrier is located in the troughs of the corrugations.

38. A downhole tubular having a corrugated wall and material located in the troughs of the corrugations.

5 39. The tubular of claim 35, wherein the troughs contain a sealing or filling material.

40. A method of sealing a tubular in a bore, the method comprising:

10 providing a downhole tubular having a corrugated wall and a sealing material located in the troughs of the corrugations;

running the tubular into a bore;

15 diametrically expanding the tubular such that the material is pushed out of the troughs of the corrugations to fill and seal the annulus between the tubular and the bore wall.

41. The method of claim 40, wherein the bore is defined by an existing tubular.

20 42. A method of running tubing into a bore to minimise differential sticking, the method comprising:

identifying whether elongate members located in a

selected bore are likely to encounter differential sticking;

providing corrugated tubing; and  
running the tubing into the bore.

5 43. A method of running tubing into a bore, the method comprising:

running a tubular defining a helical configuration into the bore; and

rotating the tubular in the bore.

10 44. The method of claim 43, comprising rotating the tubing to advance the tubular axially in the bore.

45. The method of claim 44, comprising rotating the tubular a predetermined number of times to advance the tubular a predetermined axial distance in the bore, related  
15 to the pitch of the corrugations.

46. The method of claim 44 or 45, comprising rotating the tubing to negotiate a tight spot in the bore.

47. The method of claim 44, 45 or 46, comprising rotating the tubing to dislodge sediment in the bore.

20 48. The method of claim 44, 45, 46 or 47, comprising

rotating the tubing during a cementing operation.

49. The method of any of claims 44 to 48, comprising rotating the tubing during a bore-cleaning operation.

5 50. A downhole tubular for location in a lateral bore, the tubular having a corrugated wall.

51. A reelable downhole tubular, the tubular having a corrugated wall.

10 52. Downhole tubulars comprising at least corrugated end portions, whereby the tubulars are adapted to be coupled to one another by locating the corrugated end portion of one tubular within the corrugated end portion of another tubular.

15 53. The tubulars of claim 52, wherein the corrugations are helical and define a thread.

54. The tubulars of claim 52, wherein the corrugations are circumferential.

55. The tubulars of claim 52, 53 or 54, wherein the corrugated end portions are parallel.

56. The tubulars of claim 52, 53 or 54, wherein the corrugated end portions are tapered.

57. The tubulars of any of claims 52 to 54, wherein deformable sealing material is provided on the corrugated end portion of at least one of the tubulars.

58. A downhole tubular having a corrugated upper portion adapted for engaging a tubing hanger.

59. A method of forming a tubing hanger, the method comprising:

10        providing a first tubular to be hung from a second tubular previously located in a bore, at least one of the upper end of the first tubular and the lower end of the second tubular being corrugated; and

15        running the first tubular into the bore such that the upper end of the first tubular and the lower end of the second tubular engage.

60. The method of claim 59, wherein a fluid flow path is provided between the upper end of the first tubular and the lower end of the second tubular.

20        61. The method of claim 60, comprising subsequently closing the flow path.

62. The method of any of claims 59 to 61, comprising subsequently expanding and flattening the corrugated end portion.

5 63. A method of forming a tubing hanger, the method comprising:

providing a first tubular to be hung from a second tubular previously located in a bore, at least one of the upper end of the first tubular and the lower end of the second tubular being corrugated and an outer diameter of the upper end of the first tubular being of greater diameter than the lower end of the second tubular; and/

10

running the first tubular into the bore such that at least one of the upper end of the first tubular and the lower end of the second tubular is elastically deformed to provide for positive engagement therebetween..

15

64. A method of locating a tubular within a larger diameter bore, the method comprising:

providing a corrugated tubular;

locating the tubular in a larger diameter bore; and

20 reducing the degree of tension applied to the tubular such that the tubular axially contracts and diametrically expands.

65. The method of claim 64, wherein the tubular is



initially under tension.

66. The method of claim 64 or 65, wherein the degree of tension applied to the tubular is reduced by placing the tubular in compression.

5 67. The method of claim 64, 65 or 66, wherein the degree of diametric expansion of the tubular is such that the tubular engages the surrounding bore wall.

68. Completion tubing having at least a portion of corrugated wall to accommodate a degree of axial  
10 compression or expansion.

69. The tubing of claim 68, in combination with a seal for locking a lower end of the tubing relative to surrounding bore-lining tubing.

70. A method of lining a bore, the method comprising:  
15 diametrically expanding a corrugated tubular in a bore.

71. The method of claim 70, further comprising selecting at least one of the degree of expansion, the expansion method, and the degree of corrugation of the tubular such  
20 that the unexpanded tubular and the expanded tubular are


substantially the same length.

72. A downhole tool or device comprising portions adapted for engaging corrugations of a corrugated downhole tubular.

5 73. The downhole device of claim 72, wherein the device is a tractor.

74. The downhole device of claim 72, wherein the device is provided in combination with a sliding sleeve.

75. A subsea tubular comprising a wall element and at least a portion of the wall element being corrugated.

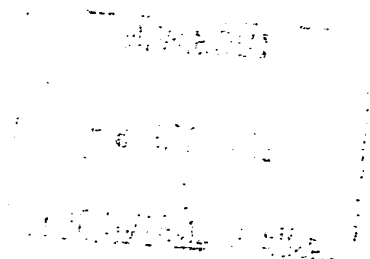

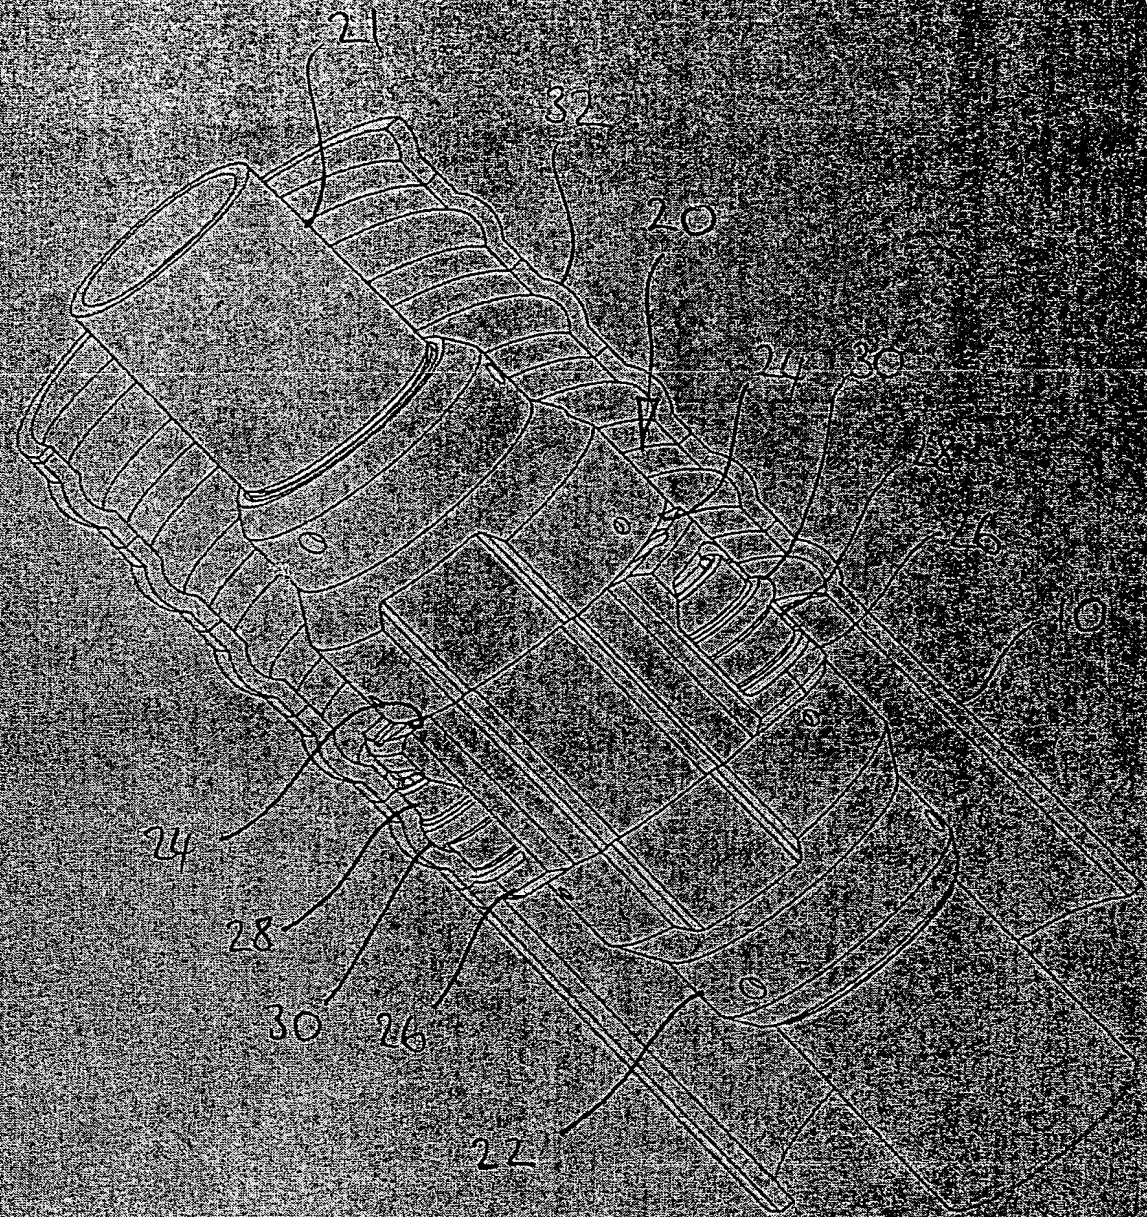


Figure 1



Figure 2

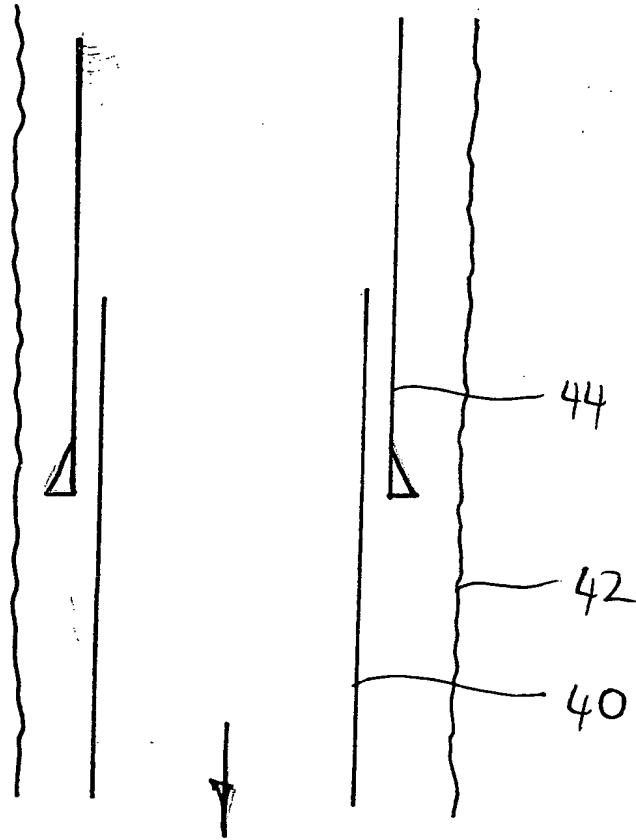


Figure 3

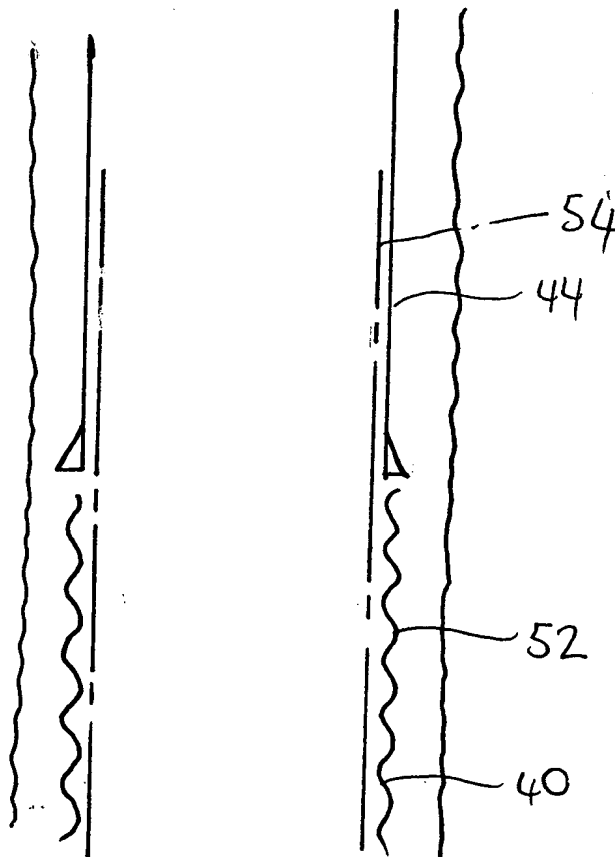




Figure 4


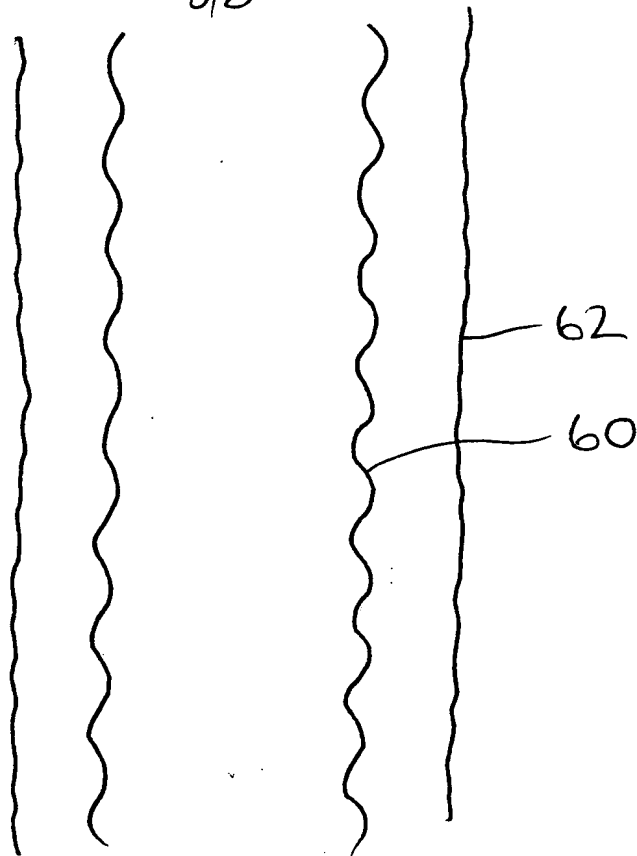


Figure 5





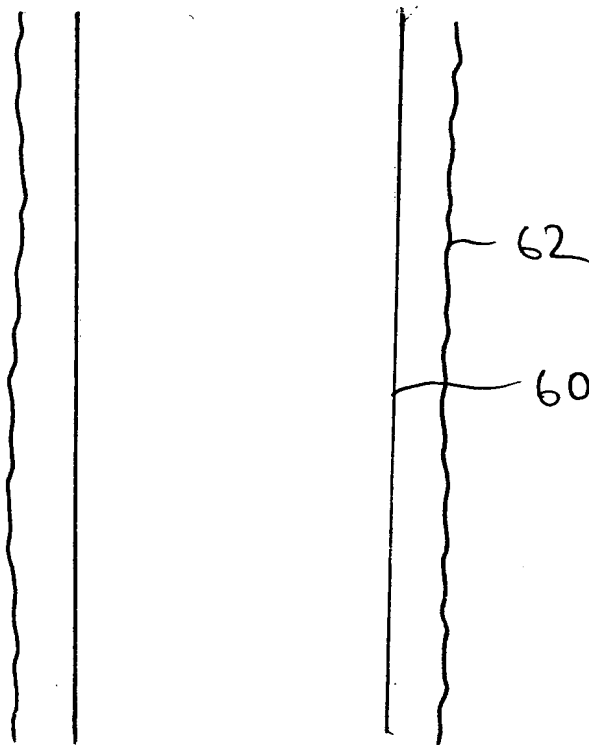

4/5

Figure 6

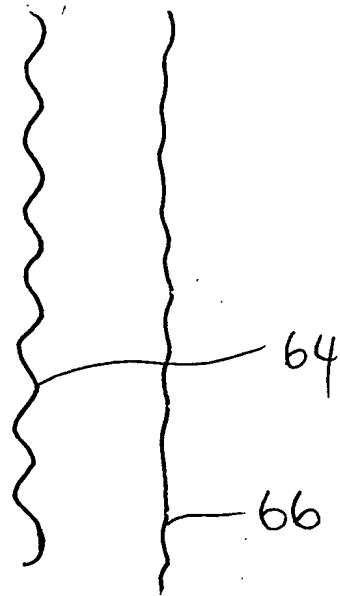
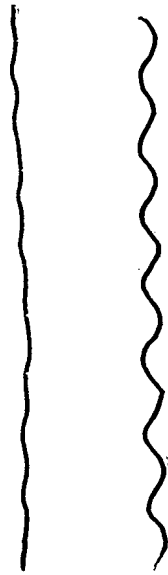
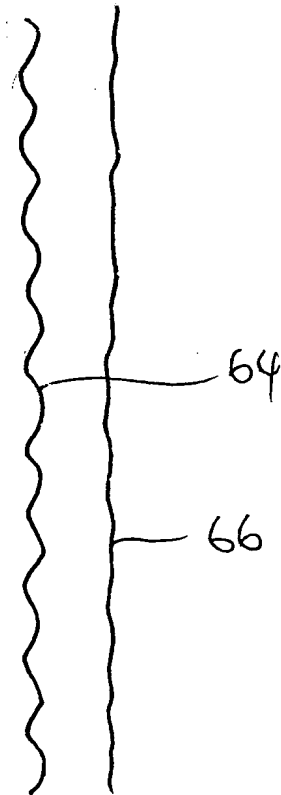


Figure 7





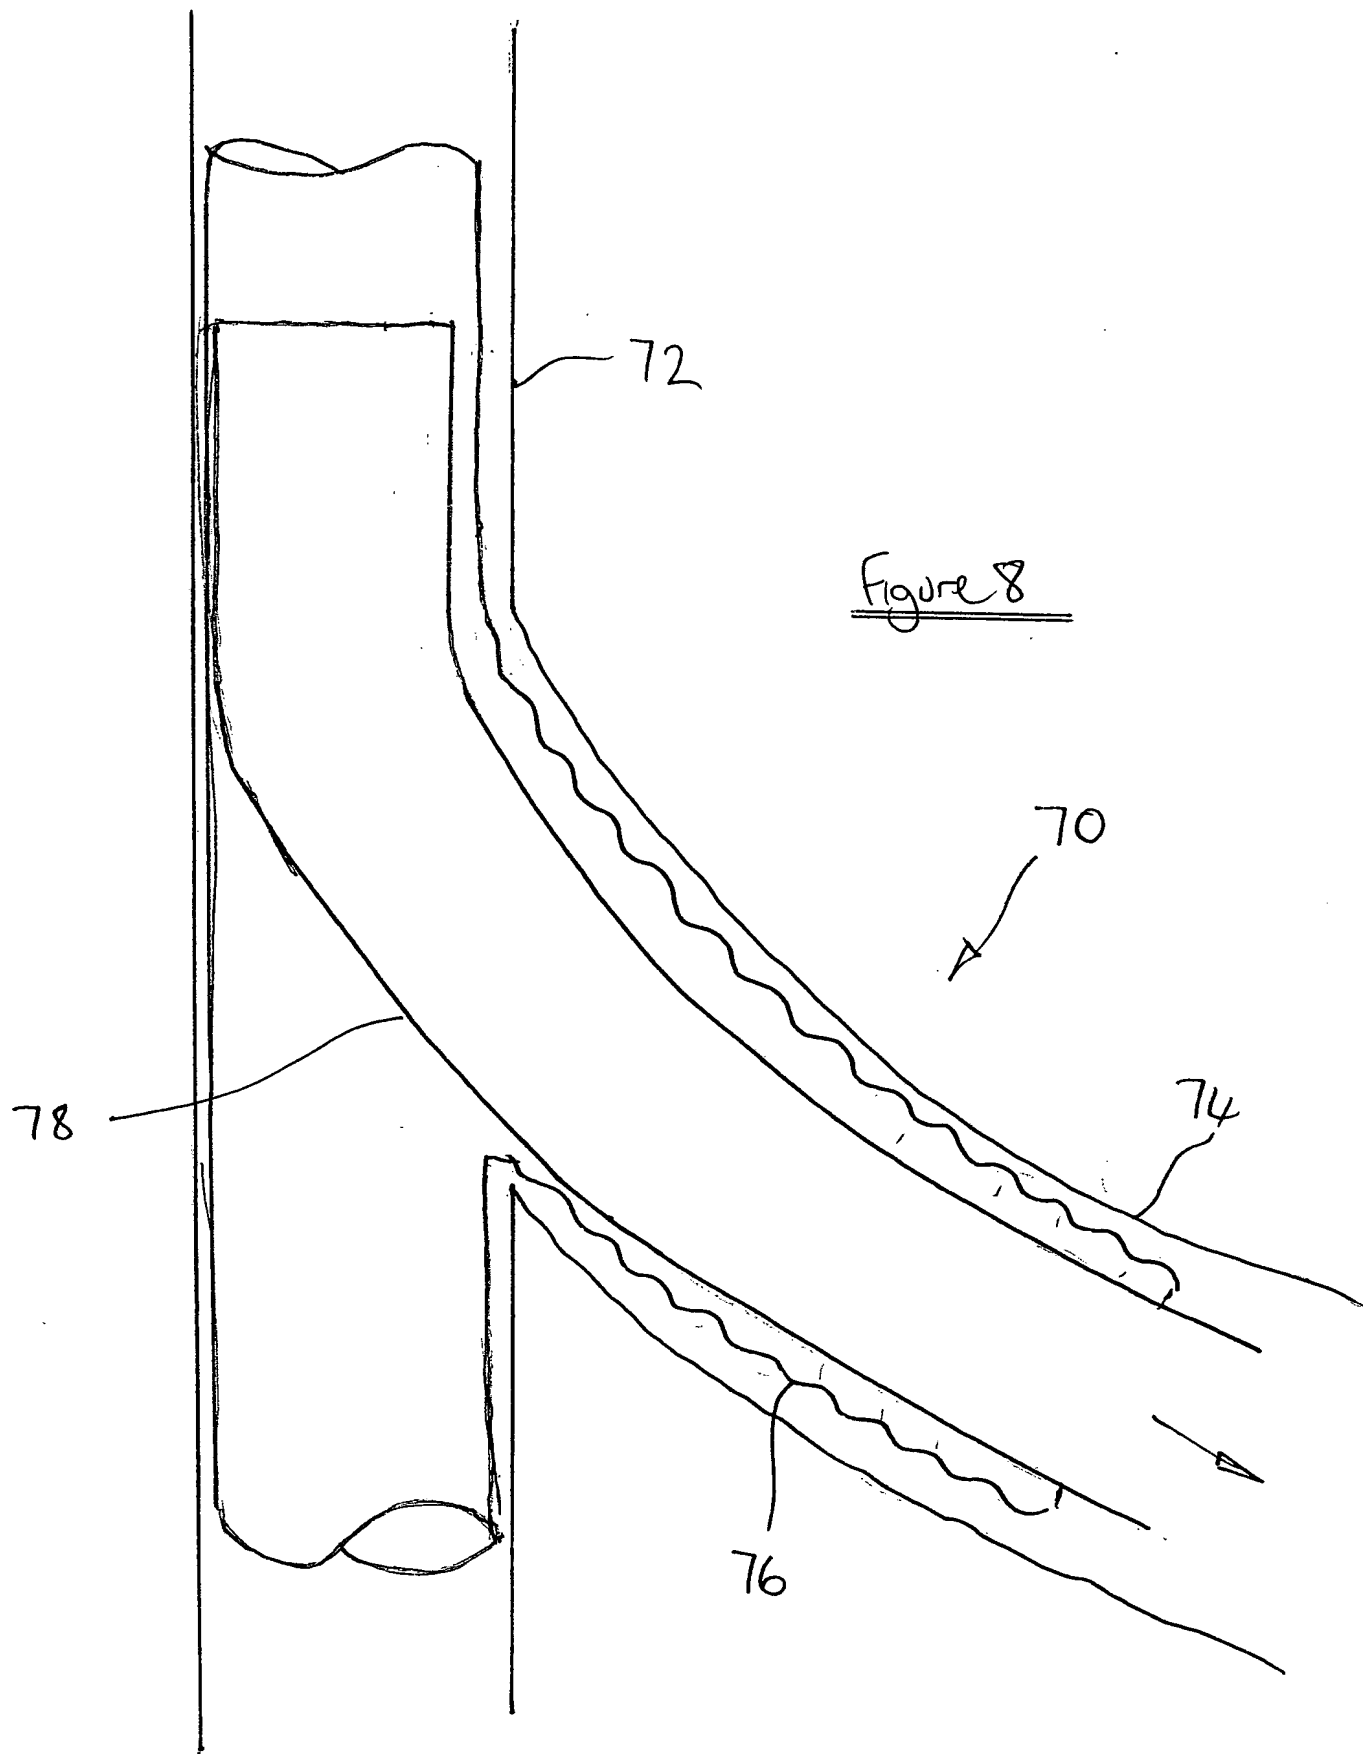


Figure 8

